

Design of roofs Dach+

Table of contents

Possible applications	2
Input	5
Assistant	5
Basic parameters	5
System	6
General	6
Geometry	6
Support	8
Cross-sections	9
Loading	10
Dead Load	10
Snow and wind	10
Load cases	11
Standard Load Cases	11
Additional Load Cases	12
Copy the snow, wind, man load cases	12
Alternative groups	12
Design	13
Design settings	13
Connection Details	13
Output	14

Note: this program with its licensable options is the successor to the previous roof programs D9 - Continuous Rafter, D11 - Purlin and Rafter Roof, D12 - Collar Beam Roof - DGK Hip Rafter / Valley Rafter.

[Basic documentation - overview](#)

In addition to the individual program manuals, you can find basic explanations on how to operate the programs on our homepage www.frilo.eu (▶ Service ▶ Articles Information ▶ Basic Operating Instructions).

Farther documents:

[Roof-Loads-Design](#)


[Fire protection analysis timber](#)

Possible applications

Dach+ calculated according to the licensed option

- continuous rafters or
- pent roof rafter,
- purlin roof or
- rafter roof,
- collar beam roof as well
- hip rafter and
- valley rafter

The roof or rafter type is selected from a selection list in the Assistant right at the beginning.

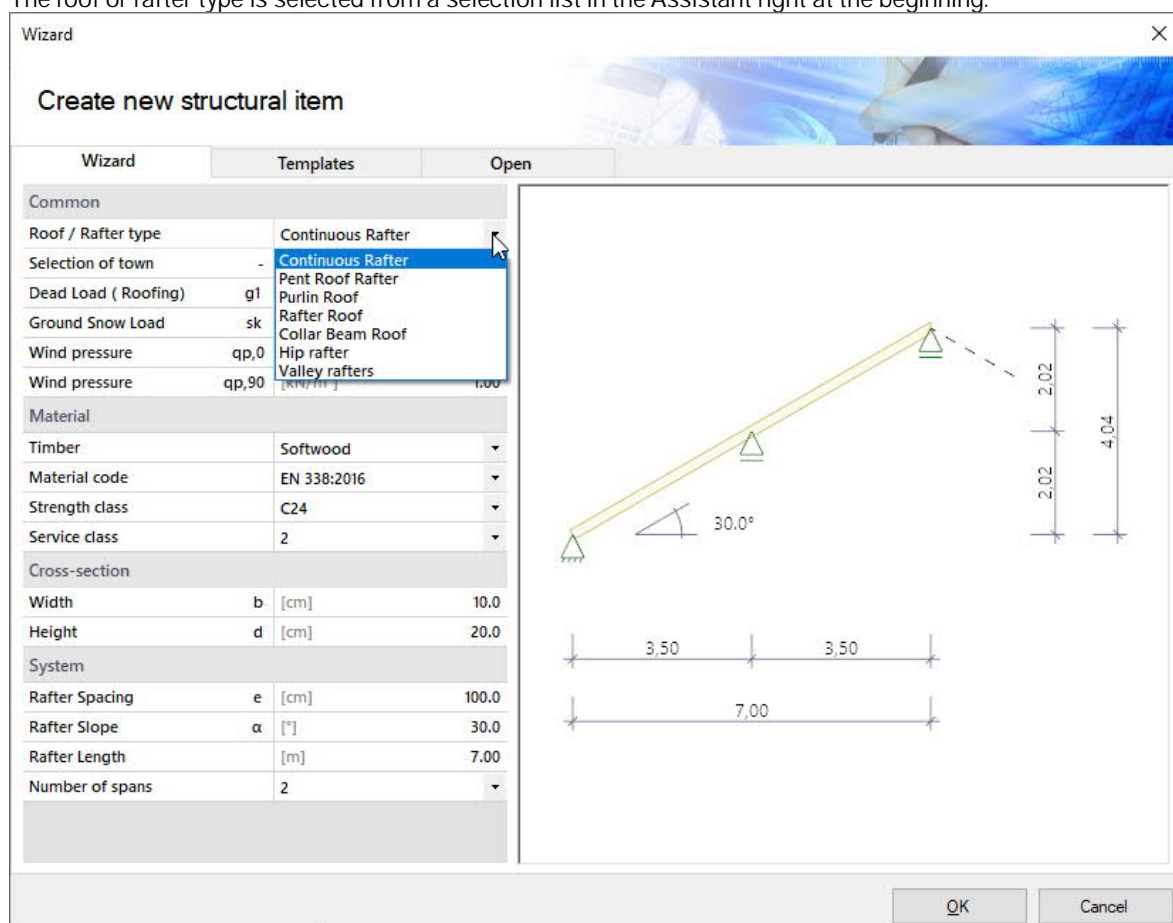

Standards

- EN 1995:2008/2014
- DIN EN 1995:2010/2013
- ÖNORM EN 1995:2010/2015/2019
- UNI EN 1995:2007
- NTC EN 1995:2008/2018
- BS EN 1995:2012/2019
- PN EN 1995:2010

DIN 1052:2008 is also available.

Options S / P / K / GK

Dach-S option: Continuous Rafter or Pent Roof Rafters

With this option, single and multiple span continuous rafters can be calculated and designed as a single component. Cantilever arms are possible on both sides.

Dach-P option: Purlin and Rafter Roof

With this option, purlin roofs and rafter roofs as well as mixed constructions of both systems can be calculated, e.g. purlin roofs with ridge joint. The rafters on the left and right are designed as continuous bending beams.

Dach-K option: Collar Beam Roof

Calculation of collar beam roofs with movable / fixed collar beam.
The collar beam can consist of one or two parts.

Dach GK option: Hip and Valley Rafter

Calculation of hip rafters and optionally valley rafters.

Systems Dach-P / Dach-K

- The roof halves can have different roof pitches
- The purlins can be at different heights
- The left and right halves of the house can be of different widths
- Horizontal and vertical bearings can be rigid, spring-loaded or movable

Loads

- Area loads, weight, snow and wind loads
- Additional loads as uniform, single or trapezoidal loads
- Man loads and wind currents in overhangs

Calculation

The system is treated statically as a framework system, taking into account the normal force deformations and the effect of the real, specified support conditions.

All load combinations are calculated and designed according to the applicable combination regulations.

Design specifications

Optionally selectable:

- proof against wind suction
- earthquake combinations
- fire design

For the permissible span/cantilever deflections of the respective verifications (based on the length L), the recommended values of the respective standard are preset as standard. These can be customized.

Since the negative deflection there usually determines the design result in the case of short cantilevers, this often undesirable influence can be optionally eliminated with the option "only positive deflection on cantilevers".

Proofs of stability

For the proof of stability, a continuous tilt bracket and continuous lateral support are used as standard and the buckling length in the rafter level is limited to $0.9 \cdot$ component length.

These boundary conditions can be adapted individually.

There are various options available for determining the stability lengths.

For each superposition, the associated effective lengths for the individual bars are determined from the eigenvalue solution. Due to numerical problems, however, the effective lengths of bars with a low normal force can be too great.

For precisely such cases, there is the option of limiting the buckling length to a maximum value.

Optionally, the buckling and tilting lengths can be specified individually for each bar.

Alternatively, the buckling/tilting length can always be set to the bar length, component length or a specified value.

Serviceability

The serviceability verification is carried out according to the rules of EN 1995-1-1 with initial and final deformation and consideration of creep deformation.

Support forces

Support forces are output as characteristic maximum values and sum per action.

Characteristic support forces are transferred to the subsequent components for each load case, for which the decisive combinations are then created in the program called up.

In addition, the load cases per individual load case and the superpositions can optionally be output.

Load Forwarding / Associated Programs

The bearing loads can (with Roof-S /P/K) be passed on to the multi-span timber beam HTM+.

The interface to the RSX Framework enables an alternative calculation.

Entered [connection details](#) (rafter base point) can optionally be passed on to the corresponding toolbox module for calculation (the corresponding item "TB Toolbox" is then displayed here).

SEMA import/export

"*.sema" files can be imported/exported via File ▶ Import or Export.

Find out more about this in the SEMA manual.

Input

General information on the input fields

This program can be used to calculate according to various standards or national annexes. These standards differ considerably in terms of load approaches, combination rules, determination of the decisive internal forces and verification.

The input fields and selection options described below can therefore differ from one another depending on the selected standard.

Assistant

After starting the program, the [assistant](#) opens automatically, with which you can quickly and easily create a calculable basic system.

Here you select the type of roof or rafter: continuous or pent roof rafters, purlin or collar beam roof, hip and valley rafters.

Furthermore, the necessary/most important parameters are queried here.

An item can then be further developed on this basis.


Note: the other roof types can also be called up using the "Connected programs" button in the upper menu ribbon.

Basic parameters


Selection of the standard and the material. You can also enter the strength and service class as well as the specific weight here.

Strength class

The strengths and stiffnesses can be adjusted. To do this, click in the input field and press the F5 key. You can enter/edit/save/load new material in the "User-defined material" pop-up menu.

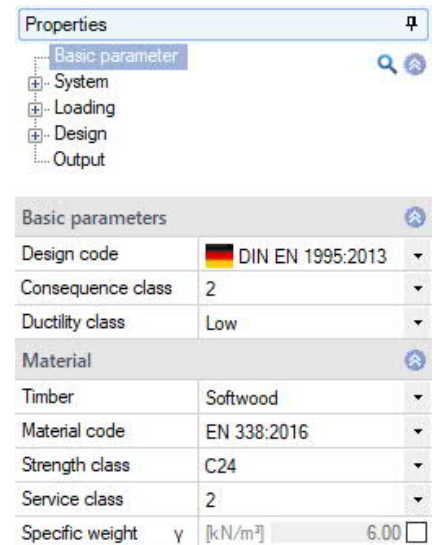

The screenshot shows the 'Properties' window with a tree view containing 'Basic parameter', 'System', 'Loading', 'Design', and 'Output'. Below it is the 'Basic parameters' table with the following data:

Basic parameters	
Design code	 DIN EN 1995:2013
Consequence class	2
Ductility class	Low
Material	
Timber	Softwood
Material code	EN 338:2016
Strength class	C24
Service class	2
Specific weight	γ [kN/m ³] 6.00

System

Note: the following entries differ depending on the selected roof or rafter type.


Remarks

You can enter [remarks about the system](#) that optionally appear in the output.

General

Here you define the other properties depending on the selected roof type.

Rafter spacing	Center distance of the rafters
Rafter type	Choice of continuous or pent roof rafters
Symmetrical	Symmetrical or asymmetrical roof
Ridge connection	Rigid, pinned or open
With ridge purlin	Yes/no
With collar beam	Yes/no

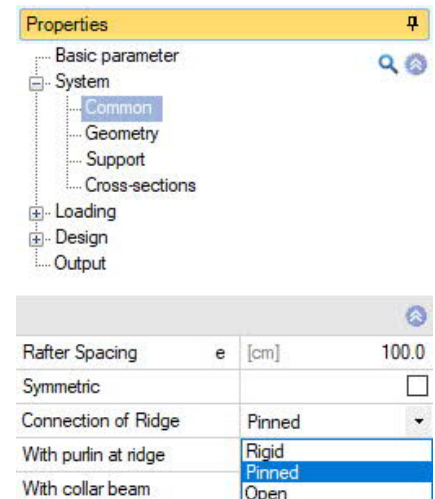

Geometry


Depending on the selected roof type and symmetry, the appropriate input fields are displayed.

Rafters (left / right)

- Slope α The angle of slope of the rafters - can also be changed directly in the graphic.
- Number of fields Up to 5 fields/sections are possible.
- Span 1, 2 ... Lengths of the individual spans. Span 1, Span 2, etc.
- Cantilever Length of the cantilever.
- Overhangs Definition of a free roof overhang.
The overhang plays a role above all for the approach of wind underneath currents, but also for the consideration of the extension loads.
Overhang = start of the rafter to the edge of the house.

Collar beams

- Distance to the ridge Distance of the collar beam to the ridge.
- Collar Beam Length Display of the calculated collar beam length.
- Number of fields Up to 4 fields with different lengths (field 1, field 2 ...) are possible.
- Fixed If the option is marked, the collar beam roof cannot be moved, otherwise it can be moved.
- With support Optional supports at the collar beam ends.

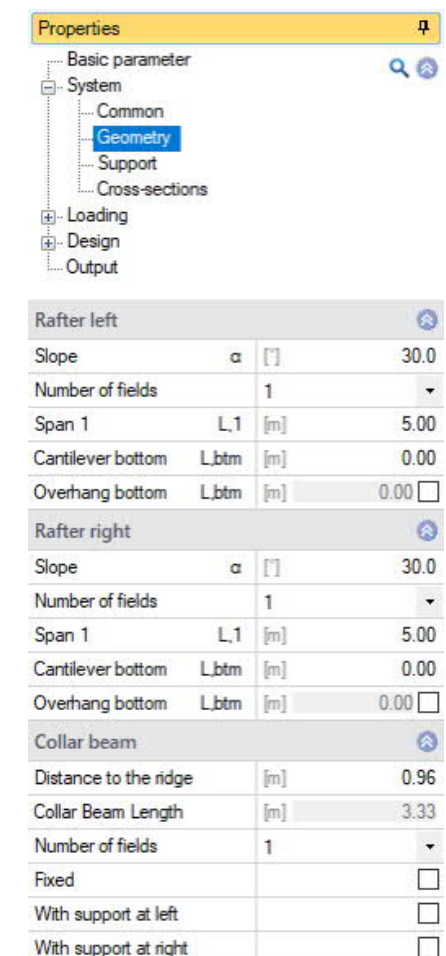

Hip or valley rafters

Various input options are available for defining the roof envelope. The dimensions/values are displayed in the graphic for checking and can also be changed there directly.

System limits

Type

Single span system:

the simplest entry with a 90-degree angle, without span subdivisions, cantilever arms, floor plan angles, etc.

Right-angled and symmetrical:

As with the single-span system, however, the top can be subdivided into spans as a result of purlins. Both sides are symmetrical. The input fields for the shift rafters can be expanded.

Right-angled:

an asymmetrical span division is possible here.

Floor plan angle freely selectable:

as right-angled, in addition, the input field for the plan angle can be edited.

Crippled hip-like:

A one-sided overhang is also offered here

(→ greater length of the shift rafters for the load introduction area).

At right angles over heights and lengths:

Input about the height and projection length of the marginal planes.

At right angles across heights and angles:

Input about the height and angle of the marginal shift planes.

Angle in the floor plan

The angle between the eaves is illustrated in the graphic and can also be changed there directly.

Main roof pitch

Angle of slope on the main or secondary roof.

Main roof base length

Basic length in the direction of the main roof or the secondary roof.

Main roof projection length

edge shifters With the type "right-angled over heights and lengths/angles, the projection lengths for the main and secondary roofs are entered here.

Ridge height

Informative display or changeable value for the height of the ridge.

Main roof overhang

Overhang on the hipped roof.

Schifters rafters (main or secondary roof)

Cantilever


Length of the cantilever arms above or below.

Number of fields

Die Eingabe von bis zu 3 Feldern ist möglich.

Span 1..3

Length of the individual spans.

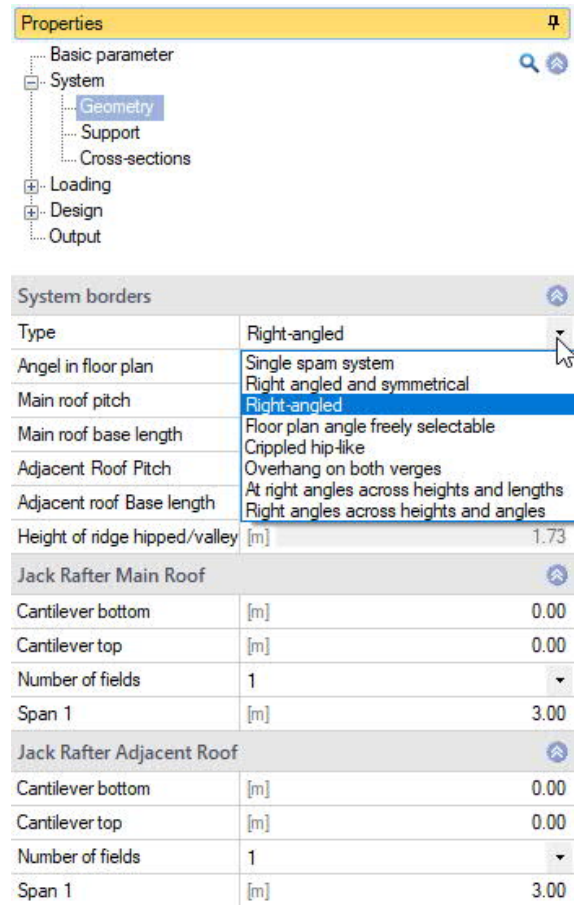

Support

In the Common section, to simplify the entry, you can specify whether the same (standard) mouth depth should apply to all supports or whether you want to enter this value yourself (then check the box) and whether the horizontal and vertical supports should all be rigid.

Depending on the selected roof type, you can call up the corresponding support tables.


Call up the support table(s) via the table symbol or via the tab below the graphic.

The horizontal and vertical supports are entered. If the option is marked, the support is rigid. To enter a custom value, remove the check mark.

An (optional) mouth or incision depth [cm] weakens the rafter cross-section in the support areas.

Active With hip/valley rafters, the supports are created automatically as a result of the purlins of the shift rafters - if you do not want this, you can set the supports inactive using this option (you can find the option in the table entry under the tab "Supports due to purlins").

Additional supports In the case of hip/valley rafters, additional supports (e.g. as a result of supports) can be created in the table using the "+" symbol.

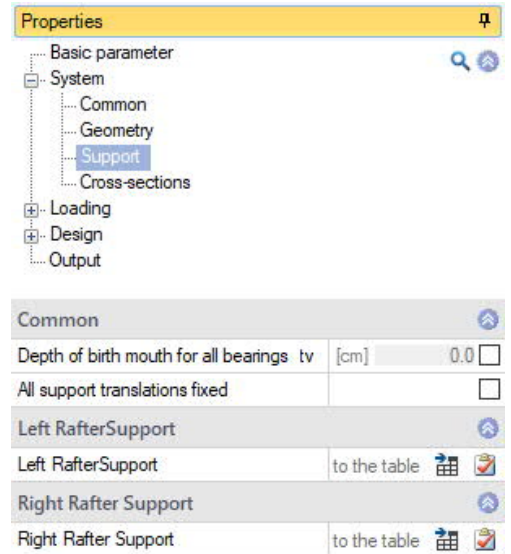


No.	Horizontal Support	Vertical Bearing	Depth of Birth Mouth
	[kN/m]	[kN/m]	[cm]
1	2	rigid <input checked="" type="checkbox"/>	rigid <input checked="" type="checkbox"/> 0.0

Fig. : Tab under the graphic.

Connection details of the rafter base points

The functions/dialogs for the rafter bases can be called up via the context menu of the supports.

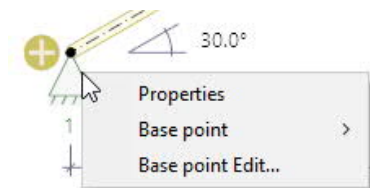


Via "Connected programs" (in the menu above), the connection details can optionally be forwarded to the corresponding toolbox module (rafter base) for calculation.

See also Design ▶ [Connection Details](#).

Cross-sections

Number	Number of cross-sections (1 or 2).
Width/Height	Display of the selected or input of the cross-section dimensions.
Different cantilever	If necessary, other cross-sections than for the rafters can be selected for the cantilever arms. Check this option to display the corresponding input fields.

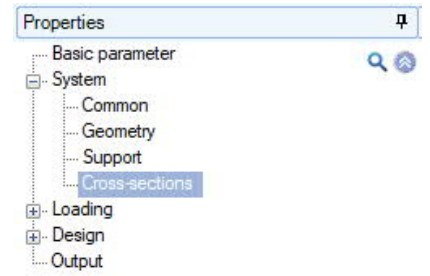

Rafter left			
Number		1	▼
Width	b	[cm]	10.0
Height	d	[cm]	20.0
Different cantilever			<input type="checkbox"/>
Rafter right			
Number		1	▼
Width	b	[cm]	10.0
Height	d	[cm]	20.0
Different cantilever			<input type="checkbox"/>
Collar beam			
Number		1	▼
Width	b	[cm]	10.0
Height	d	[cm]	20.0

Loading

Dead Load

Dead weight autom. Here you choose whether you want to calculate with or without dead weight.

Rafter

g1/g2/g3 The loads "g1" and "g2" act over the entire length of the rafter. Your load coordinates are related to the roof area. The loft conversion load "g3" acts from the edges of the house ground to the ridge or between the edges of the house ground.


Loft conversion bottom gb The program applies the lower load on the collar beam roof between the bottom support and the collar beam.

Roof payload (man load) No or only single load.

PV-system Photovoltaic system: select this option to show the corresponding parameters.

Collar beam

Both permanent loads gk and live loads pk can be specified for collar beams. The live loads are assumed to be one-sided for the asymmetrical load cases.

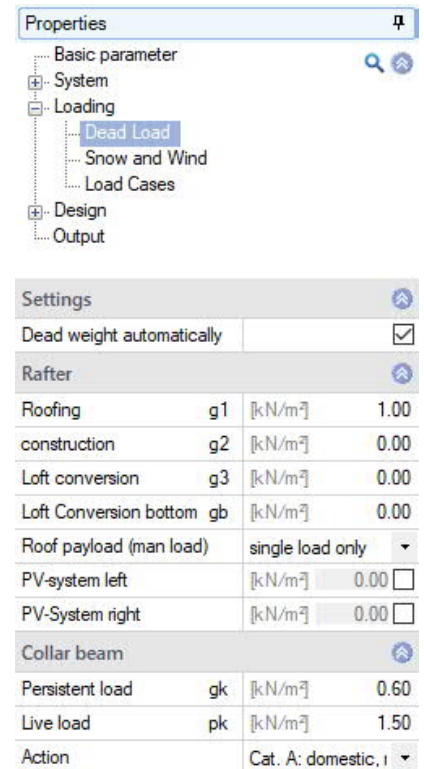


Snow and wind

Basic values

Basic values This button opens the snow and wind load dialog.

Town selection Display of the municipality selected under "Base values". If you would like to enter your own values instead, uncheck this option and enter the values below.

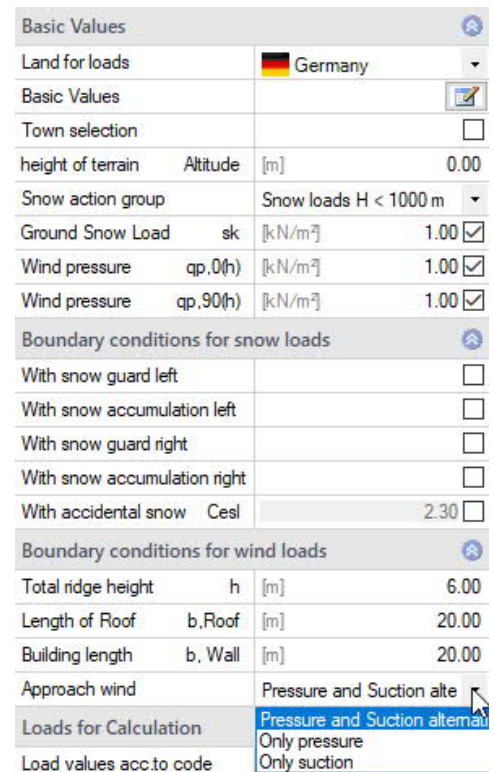

Boundary conditions for snow loads

Snow skirt and snow accumulation can be selected left and right. Since the factors for exceptional snow loads can differ between the National Annexes, the *Cesl* value can be modified if necessary.

Boundary conditions for wind loads

Ridge height Height of the ridge above the terrain.

Roof length Roof length as the width of the wind attack b.

Building length Building length as the length of the wind attack for walls.

Approach wind Pressure and suction alternatively, only pressure, only suction.

Wind range With the ridge/valley rafter, you can optionally choose which wind range is to be used as the basis for the averaged wind load on the main/secondary roof. Otherwise the program automatically takes the area with the greatest wind pressure.

Loads of Calculation

Load values acc. to code Deactivate this option to be able to enter your own values.

Load cases

You can use the "to the table" symbol or the tabs under the graphic to access the tables for the standard load cases or the additional load cases.

Settings


- Equal γ_G for permanent loads If the option is selected, permanent loads are also combined, otherwise they are all applied the same.
- ...as dependent load cases If the option is selected, the loads are assumed to be "dependent" and combined. Note that when you choose a dependency, you must ensure that the loads always occur together at the same time!
- Live load on Collar Beam ... If the option is selected, the live load on the collar beam is considered independently span by span.

Standard Load Cases

Wind and snow loads are automatically generated as "Standard Load Cases" in accordance with the applicable standards. These load cases can be switched on and off in the table individually or as a whole in the "Active" column, but they cannot be edited.

"Standard load cases" can be copied to "[Additional load cases](#)" and edited there ("Copy all snow, wind, man load cases").


To display the table, click on the "Standard Load Cases" tab below the graphic.

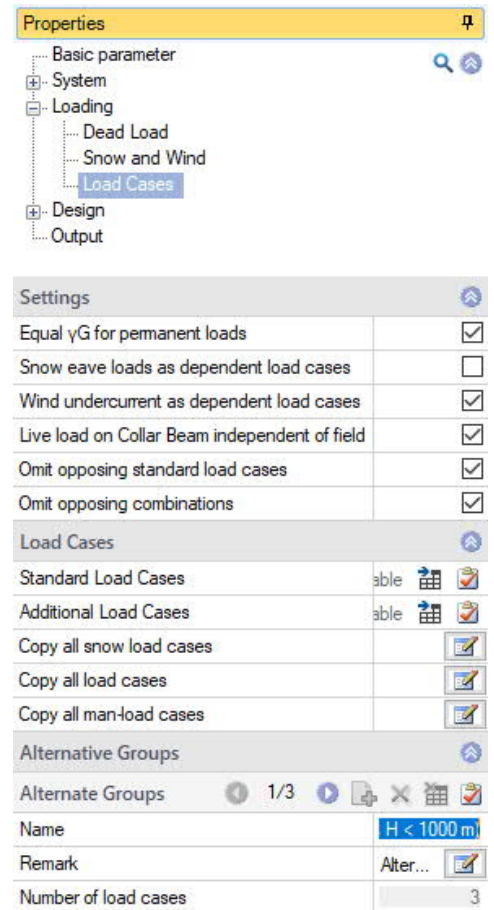

Additional Load Cases


Here you can create your own load cases or copy "Standard Load Cases" in order to add or change them.

Note: for a new table row click on the right  symbol.

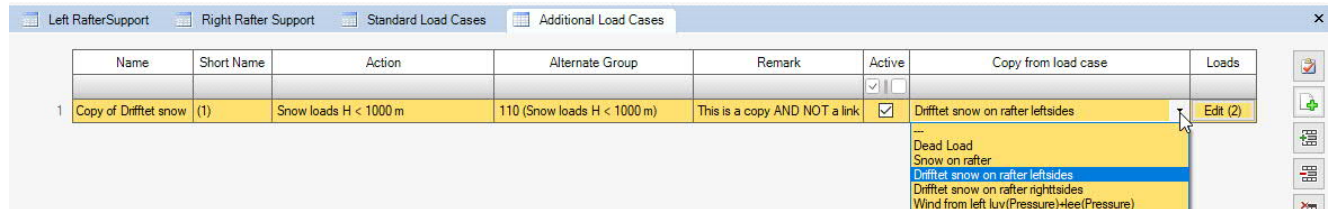

Alt. group Load cases to which you assign the same alternative group number (>0) do not act simultaneously (but rather "alternative").

For each load case loads can be entered via the "Edit" button:

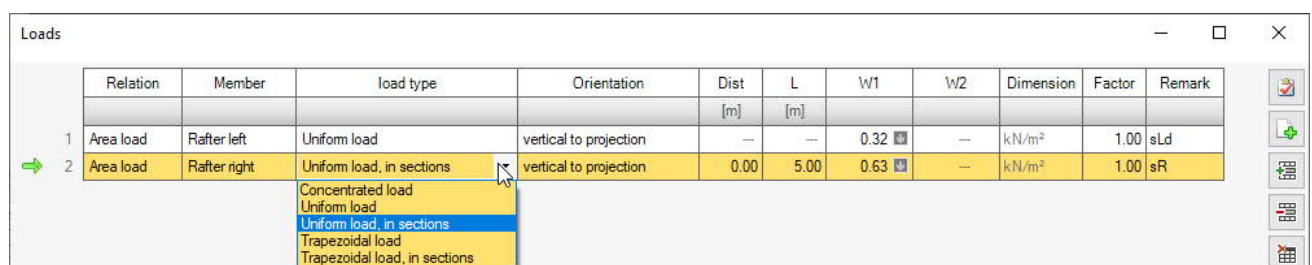


Load type Uniform load, trapezoidal load and point load.

Orientation vertically, horizontally, across, lengthways, with constant or trapezoidal load vertical to the beam/to the projection, across the beam

Dist. Specifies the distance of the load from the start of the component.

L Specifies the length of the line load.

W1, W2 Load value at the beginning or at the end of the line load.

A load value compilation can be called up using the "arrow symbol" 

Factor The load value is multiplied by this factor.

During the calculation, all load cases marked as "active" (standard and additional load cases) are automatically superimposed according to the valid combination rules, taking into account the alternative groups.

Copy the snow, wind, man load cases

All corresponding standard load cases can be copied into the additional load case table with the selection function "Copy from load case". The corresponding original load cases are then automatically deactivated.

Alternative groups

Loads to which you assign the same alternative group number are mutually exclusive.

Example: wind loads from different directions.

Note: the earlier functionality "Affiliation groups" was omitted, since load case input is now used.

Design

Design settings

Calculation rules

- Only positive deflection on cantilever arms
- The reference length for the total deflection is the length of the member or the component.
- kmod Wind averaged
- With equilibration check
- With overhang on the gable end
- Influence of creep under pressure:

The influence of creep can optionally be taken into account as follows for components subject to compression:

- The stiffnesses should not be reduced as a result of creep.
- The stiffness should be reduced as a result of creep from a constant load component.
- The stiffness should be reduced as a result of creep from permanent and quasi-permanent load components.

Ultimate Limit State

- Fire protection design

Check this option to display the input fields for the fire design. If this option is selected, the stress verifications are also carried out in the event of a fire.

The verification procedures simplified/precise procedures are available.

In addition to the fire resistance class or the burn time, the burn rate βn can also be specified separately for each side.

See also document [Fire protection analysis timber](#).

Buckling and tilting lengths

- Selected member Selection of the component (rafter, collar beam).

Cold Design

Options/values for the cold design.

Serviceability


w,inst	Limit of elastic deflection
w,net,fin	Limit value of the sum of elastic deflection and creep deformation
w,fin	Limit of the final deformation

Connection Details

[Connection details](#) of rafter base points (with notch and threshold, with straight collar, with haunched collar).

With the Edit-button you can open the corresponding dialog.

Optional forwarding of connection details to the toolbox (Connected programs in the ribbon bar).

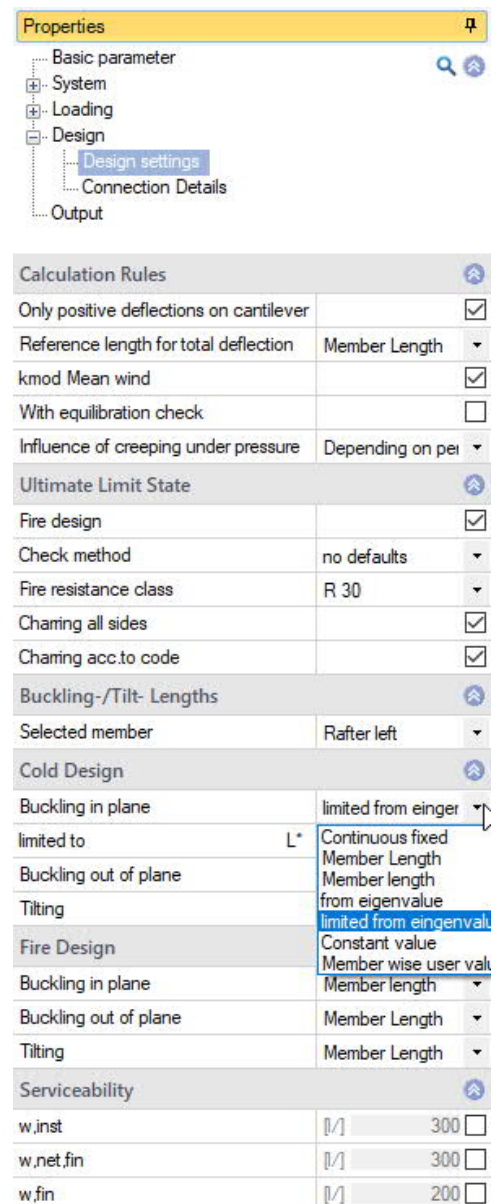

Calculation Rules	
Only positive deflections on cantilever	<input checked="" type="checkbox"/>
Reference length for total deflection	Member Length
kmod Mean wind	<input checked="" type="checkbox"/>
With equilibration check	<input type="checkbox"/>
Influence of creeping under pressure	Depending on per
Ultimate Limit State	
Fire design	<input checked="" type="checkbox"/>
Check method	no defaults
Fire resistance class	R 30
Charring all sides	<input checked="" type="checkbox"/>
Charring acc.to code	<input checked="" type="checkbox"/>
Buckling-/Tilt- Lengths	
Selected member	Rafter left
Cold Design	
Buckling in plane	limited from einger
limited to	L* Continuous fixed Member Length Member length from eigenvalue limited from eingenva
Buckling out of plane	
Tilting	
Fire Design	
Buckling in plane	Constant value Member wise user val Member length
Buckling out of plane	Member Length
Tilting	Member Length
Serviceability	
w,inst	<input type="checkbox"/> 300
w,net,fin	<input type="checkbox"/> 300
w,fin	<input type="checkbox"/> 200

Output

Before the output click on the symbol "Calculate" in the upper menu ribbon.

After the calculation, the utilization is displayed at the bottom right in the graphics window and offers a good overview of the economic efficiency of the system entered.

Output profile

By clicking on the various output options, you determine the scope of the output.


Results

You can view the result graphics via the "Results" tab in the upper menu ribbon.

Output as a PDF document

The output document is displayed in PDF format via the „[Document](#)“ tab and can be printed.

See also document [Output and printing](#).

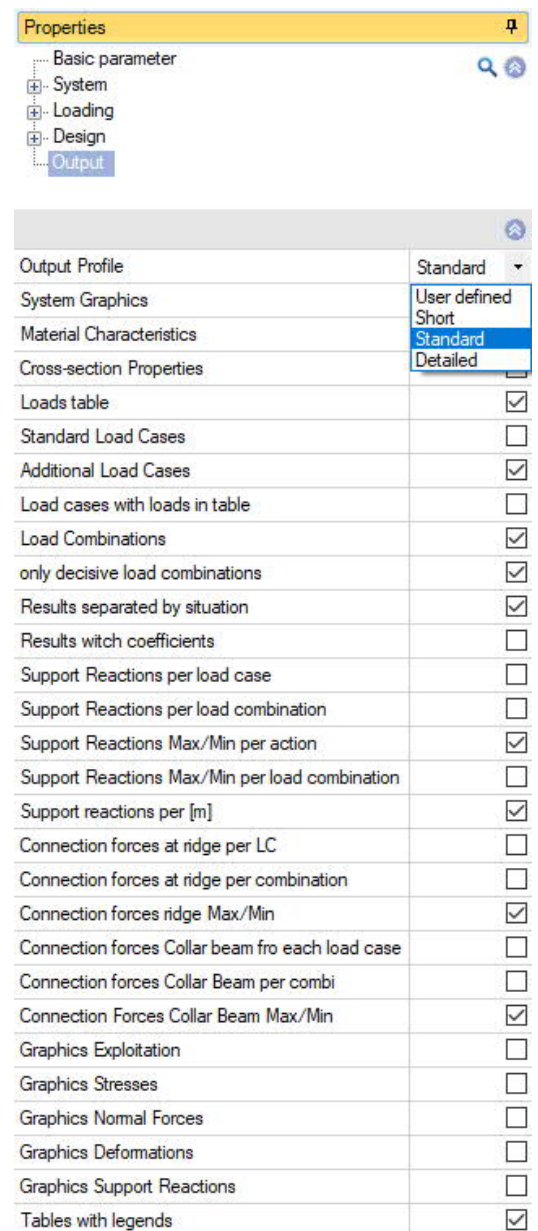

The screenshot shows the 'Properties' dialog box with the 'Output' tab selected. The 'Output Profile' dropdown menu is open, showing options: 'Standard', 'User defined', 'Short', 'Standard', and 'Detailed'. The 'Standard' option is currently selected.

Output Profile	Standard
System Graphics	User defined
Material Characteristics	Short
Cross-section Properties	Standard
Loads table	Detailed
Standard Load Cases	<input type="checkbox"/>
Additional Load Cases	<input checked="" type="checkbox"/>
Load cases with loads in table	<input type="checkbox"/>
Load Combinations	<input checked="" type="checkbox"/>
only decisive load combinations	<input checked="" type="checkbox"/>
Results separated by situation	<input checked="" type="checkbox"/>
Results with coefficients	<input type="checkbox"/>
Support Reactions per load case	<input type="checkbox"/>
Support Reactions per load combination	<input type="checkbox"/>
Support Reactions Max/Min per action	<input checked="" type="checkbox"/>
Support Reactions Max/Min per load combination	<input type="checkbox"/>
Support reactions per [m]	<input checked="" type="checkbox"/>
Connection forces at ridge per LC	<input type="checkbox"/>
Connection forces at ridge per combination	<input type="checkbox"/>
Connection forces ridge Max/Min	<input checked="" type="checkbox"/>
Connection forces Collar beam fro each load case	<input type="checkbox"/>
Connection forces Collar Beam per combi	<input type="checkbox"/>
Connection Forces Collar Beam Max/Min	<input checked="" type="checkbox"/>
Graphics Exploitation	<input type="checkbox"/>
Graphics Stresses	<input type="checkbox"/>
Graphics Normal Forces	<input type="checkbox"/>
Graphics Deformations	<input type="checkbox"/>
Graphics Support Reactions	<input type="checkbox"/>
Tables with legends	<input checked="" type="checkbox"/>